

# acecube

Dual Fluid



## Model ( AC-DF-750/140L ) ( 200G/37G )

The AceCube Dual Fluid AC-DF-750/140L tank is designed for the safe and secure transporting and storage of various industrial lubricants and hazardous liquids worldwide.

### Specifications

	Metric	US	Imperial
Capacity	750 Litres	198 Gallons	165 Gallons
Length	1643 mm	64 11/16"	64 11/16"
Width	1099 mm	43 4/16"	43 4/16"
Height	1296 mm	51"	51"
Bund Tank Material	3 mm	1/16"	1/16"
Inner Tank Material	4 mm	2/16"	2/16"
Mass (empty)	691 kg	1523 lbs, 6oz	1523 lbs, 6oz
Mass (full)	1518 kg	3346 lbs, 10oz	3346 lbs, 10oz
Safe Fill Level	712 Litres	188 Gallons	157 Gallons

### Approvals and Certifications

#### UK & Europe

- ✓ Trade Mark Certificate Europe
- ✓ Trade Mark Certificate UK
- ✓ (IBC) Intermediate Bulk Containment
- ✓ UN 31 A/Y
- ✓ Adhering to ADR regulations
- ✓ Lifting when Full Certified
- ✓ PPG2 & PPG26
- ✓ Vibration Tested
- ✓ UL142
- ✓ ULCS601-14
- ✓ Patent no: GB2502198

#### USA & Canada


- ✓ (IBC) Intermediate Bulk Containment
- ✓ TSSA 81390 ON - 2006 (Optional)
- ✓ UN 31 A/Y
- ✓ DOT USA
- ✓ DOT Canada
- ✓ Lifting when Full Certified
- ✓ Vibration Tested
- ✓ UL142
- ✓ ULCS601-14
- ✓ Patent no: GB2502198

DyMac Global  
Premium Fuel Storage Tanks

## Plastic Ad-Blue DEF 140 Litres/100 Gallons

### Specifications

	Metric	US
Capacity	140 Litres	37 Gallons
Length	714 mm	28"
Width	514 mm	20"
Height	949 mm	37"
Wall Thickness	4 mm	15"



The range has an extra large equipment compartment area that can house a variety of accessories.



DISPENSING NOZZLE VARIATIONS



HOSES WITH ISO QUICK RELEASE COUPLERS



UP TO 10M OR 32FT RETRACTABLE HOSE REELS




DIGITAL FLOW METERS



ENGINE DRIVEN OR ELECTRIC PUMPS



IN LINE PARTIAL SEPARATION FILTERS

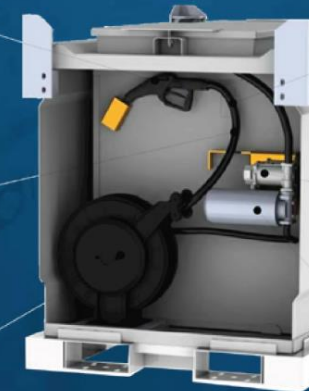

DyMac Global  
Premium Fuel Storage Tanks